The performance curves are based on the kinematic viscosity values = 1 mm²/s and density equal to 1000 kg/m³. Curve tolerance according to ISO 2548.

Liquid temperature range: from -10°C to +50°C
Maximum ambient temperature: +40°C

K 35/40

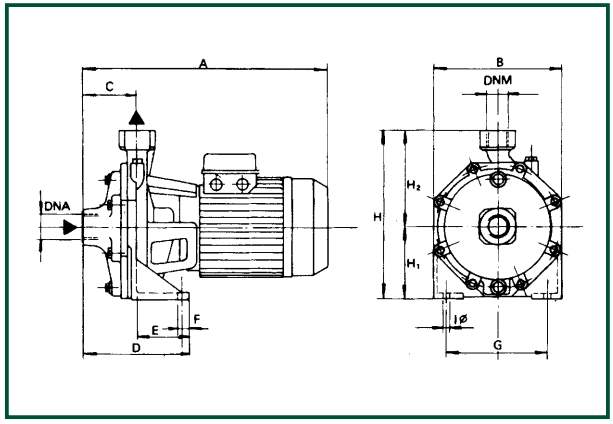

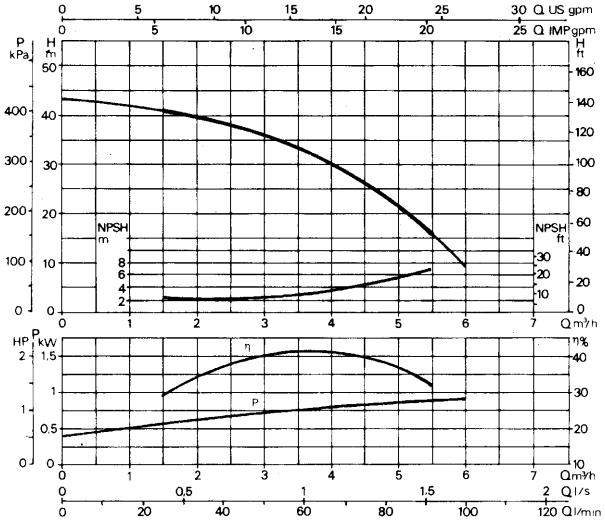

MODEL	A	B	C	D	E	F	G	I	H	H1	H2	DNA	DNM	PACKING DIMENSIONS L/A	PACKING DIMENSIONS L/B	PACKING DIMENSIONS H	VOLUME m³	WEIGHT Kg
K 35/40	342	180	76	148	72	15	148	9.5	235	100	135	1" G	1" G	390	220	252	0.021	15.9

MODEL	ELECTRICAL DATA											HYDRAULIC DATA (n ≃ 2850 1/min)						
	VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL kW	P2 NOMINAL HP	In A	I st. A	1/min	η max %	cos φ	CAPACITOR µF	CAPACITOR Vc	Q m³/h	0	1,2	2,4	3,6	4,8	5,5
												Q l/min	0	20	40	60	80	91,6
K 35/40 M	1x220-240 V ~	1.2	0.75	1	5.4	18.5	2800	72.8	0.96	20	450	H (m)	43.5	41.5	38	33	23.5	16
K 35/40 T	3x230-400 V ~	1,2	0,75	1	3,8-2,2	22,14-12,8	2816	78,6	0,77	–	–							